SCHLEIFENBAUER
LIVING FOR THE POWER TO DELIVER

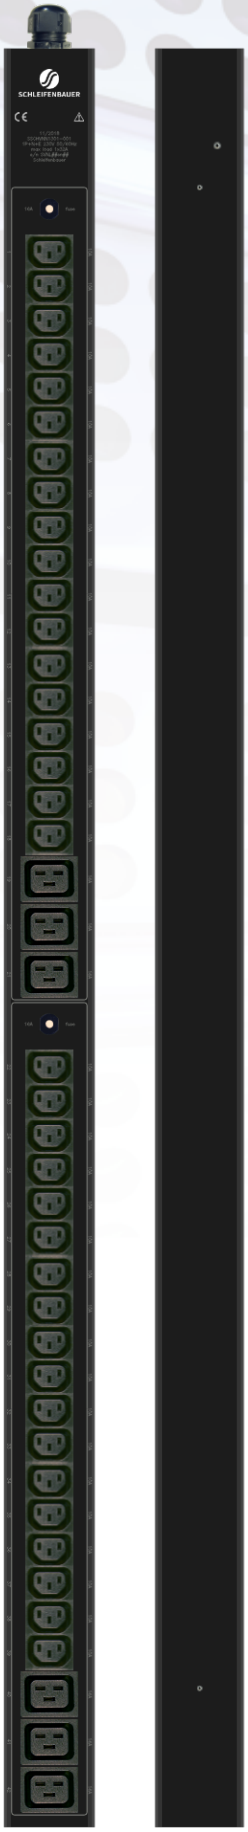

Summary:

- vertical PDU (0 U)
- single phase 32 A
- basic
- 42 outlets

034073VNN13-R086

BASIC PDU

SPECIFICATIONS

DIMENSIONS	L x W x D = 1280 x 65 x 52.5 mm (0U) (excl. strain relief, mounting & cable bending radius)
ENCLOSURE	Profile color black, aluminium with stainless steel covers (IP20)
MOUNT	Toolless mount buttons (brackets not included) (distance=1080, positions=100, 1180mm) 
POWER INPUT	single phase 32 A, 230VAC - 50/60Hz
CABLE ENTRY	power entry side-cover top
CABLE & PLUG	Power lead (3G6 halogenfree) with CEE plug 3,0m (strain relief height 2,5cm)
FUSES	2 x thermal breaker 16A (ETA)
OUTLETS	36 x IEC 60320 C13 , 6 x IEC 60320 C19