SCHLEIFENBAUER
LIVING FOR THE POWER TO DELIVER

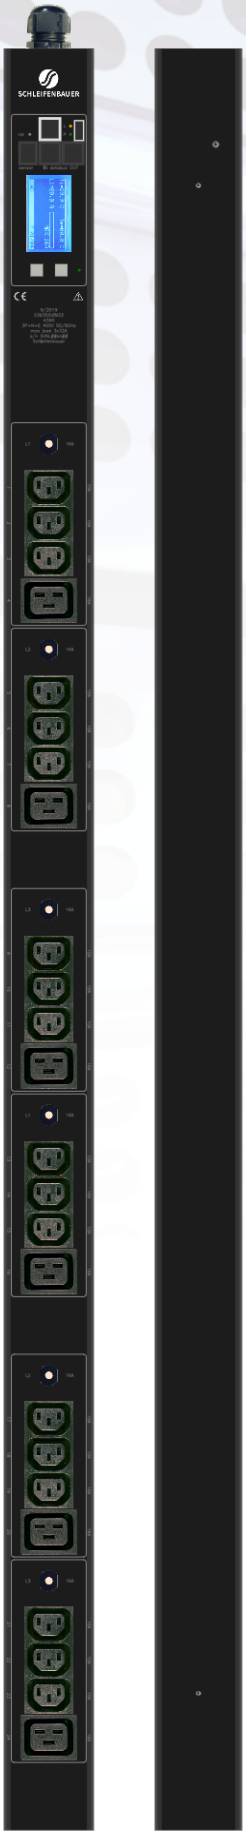

Summary:

- vertical PDU (0 U)
- three phase 32 A
- metered input
- metered outlets
- 24 outlets

036355VIM33-4340

MONITORED PDU

4340

SPECIFICATIONS

DIMENSIONS	L x W x D = 1300 x 65 x 52.5 mm (0U) (excl. strain relief, mounting & cable bending radius)
ENCLOSURE	Profile color black, aluminium with stainless steel covers (IP20)
MOUNT	Toolless mount buttons (brackets not included) (distance=1100, positions=100, 1200mm)
POWER INPUT	three phase 32 A, 230/400V - 50/60Hz
CABLE ENTRY	power entry side-cover top
CABLE & PLUG	Power lead (5G6 halogenfree) with CEE plug 3,0m (strain relief height 2,5cm)
CONNECTIVITY	databus: 2 x RJ45 | Ethernet: RJ45 | sensorport: RJ11 | USB
INPUT METERING	volt, ampere, kWh, power factor
METERED OUTLETS	24 times volt, ampere, kWh, power factor
FUSES	6 x Thermal breaker 16A (ETA)
DISPLAY	LCD display with backlight and configurable orientation
OUTLETS	6 x IEC 60320 C19, 18 x IEC 60320 C13