




SCHLEIFENBAUER
LIVING FOR THE POWER TO DELIVER

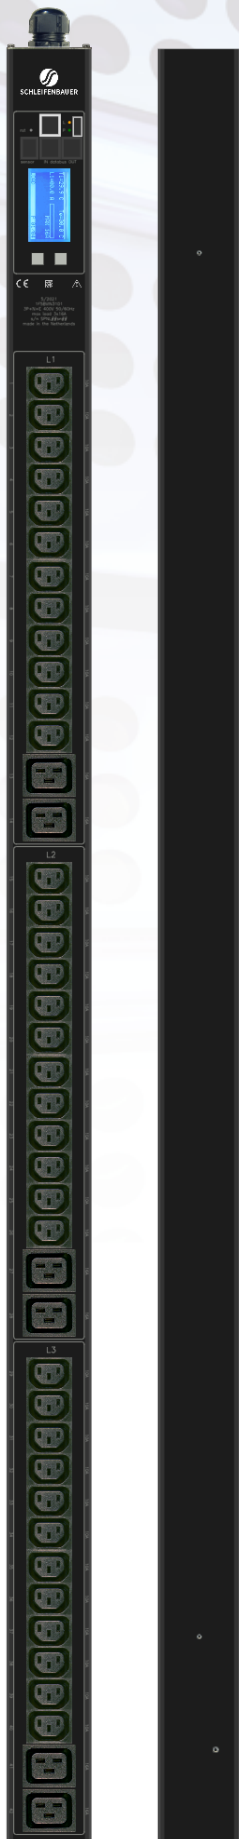

1F5BVIN3101

METERED PDU

SPECIFICATIONS

DIMENSIONS	L x W x D = 1380 x 65 x 52.5 mm (0U) (excl. strain relief, mounting & cable bending radius)
ENCLOSURE	Profile color black, aluminium with stainless steel covers (IP20)
MOUNT	Toolless mount buttons (brackets not included) (distance=1066, positions=157, 1223mm)
POWER INPUT	three phase 16 A, 230/400V - 50/60Hz
CABLE ENTRY	power entry side-cover top
CABLE & PLUG	Power lead (5G2,5 halogenfree) with CEE plug 3,0m (strain relief height 2,5cm)
CONNECTIVITY	databus: 2 x RJ45 Ethernet: RJ45 sensorport: RJ12 USB
INPUT METERING	volt, ampere, kWh, power factor
FUSES	n/a
DISPLAY	LCD display with backlight and configurable orientation
OUTLETS	36 x IEC 60320 C13 , 6 x IEC 60320 C19

Summary:

- vertical PDU (0 U)
- three phase 16 A
- metered input
- 42 outlets

