




**SCHLEIFENBAUER**  
LIVING FOR THE POWER TO DELIVER

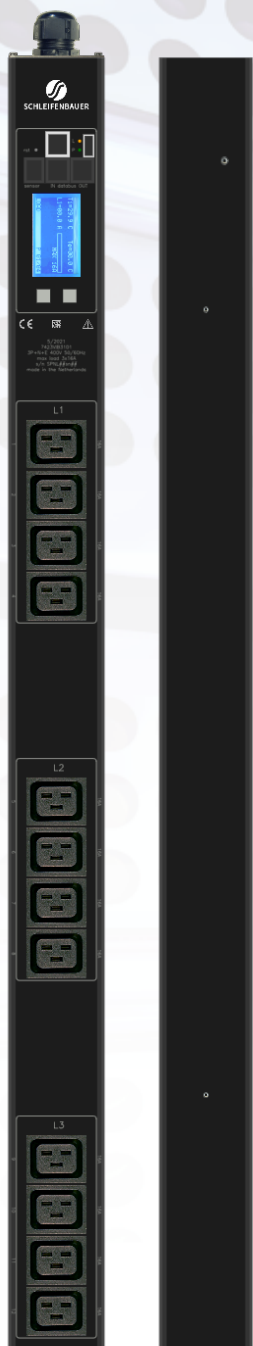

## 7423VIB3101


MANAGED PDU

### SPECIFICATIONS

**DIMENSIONS** L x W x D = 875 x 65 x 52.5 mm (0U)  
(excl. strain relief, mounting & cable bending radius)

**ENCLOSURE** Profile color black, aluminium with stainless steel covers (IP20)

**MOUNT** Toolless mount buttons (brackets not included)  
(distance=533, positions=171, 704mm)



**POWER INPUT** three phase 16 A, 230/400V - 50/60Hz

**CABLE ENTRY** power entry side-cover top

**CABLE & PLUG** Power lead (5G2,5 halogenfree) with CEE plug 3,0m  
(strain relief height 2,5cm)



**CONNECTIVITY** databus: 2 x RJ45 | Ethernet: RJ45 | sensorport: RJ12 | USB

**INPUT METERING** volt, ampere, kWh, power factor

**SWITCHED OUTLETS** 12 times bistable close to zero crossing switching relays

**METERED OUTLETS** 12 times volt, ampere, kWh, power factor

**FUSES** n/a

**DISPLAY** LCD display with backlight and configurable orientation

**OUTLETS** 12 x IEC 60320 C19

#### Summary:

- vertical PDU (0 U)
- three phase 16 A
- metered input
- metered outlets, switched outlets
- 12 outlets

