




SCHLEIFENBAUER
LIVING FOR THE POWER TO DELIVER

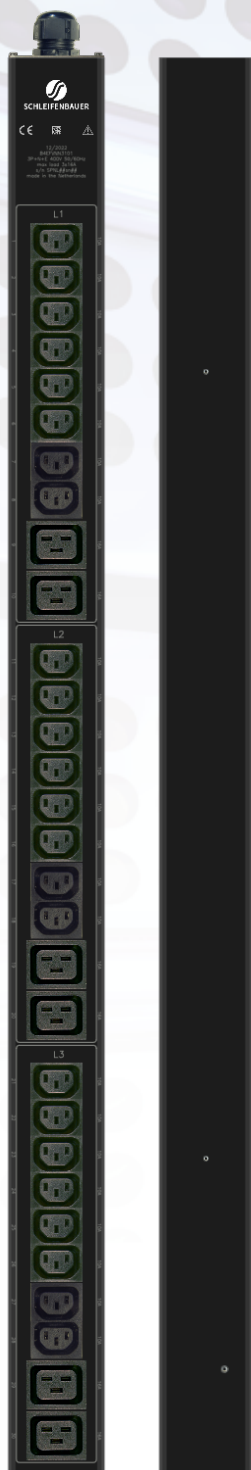

Summary:

- vertical PDU (0 U)
- three phase 16 A
- basic
- 30 outlets

B4EFVNN3101

BASIC PDU

SPECIFICATIONS

DIMENSIONS	L x W x D = 960 x 65 x 52.5 mm (0U) (excl. strain relief, mounting & cable bending radius)
ENCLOSURE	Profile color black, aluminium with stainless steel covers (IP20)
MOUNT	Toolless mount buttons (brackets not included) (distance=534, positions=213, 747mm)
POWER INPUT	three phase 16 A, 230/400V - 50/60Hz
CABLE ENTRY	power entry side-cover top
CABLE & PLUG	Power lead (5G2,5 halogenfree) with CEE plug 3,0m (strain relief height 2,5cm)
FUSES	n/a
OUTLETS	24 x IEC 60320 C13 , 6 x IEC 60320 C19

